Skyreach pty ltd
the only way up!

EQUIPMENT HIRE GUIDE
2026 EDITION



SKYREACH CAPABILITY & EQUIPMENT GUIDE

Safe up there. Capable down here.

30+ YEARS' EXPERIENCE

HEIGHT SAFETY & ACCESS SPECIALISTS

SERVING THE EAST COAST AND BEYOND

Scissor lifts · Boom lifts · Man lifts · Telehandlers
Forklifts · Lighting & air · Attachments

1800 457 145
skyreach.com.au

COMPANY OVERVIEW

Confidence at every level.

At height, reliability isn't optional. That's why Skyreach delivers safe, efficient and high-performing access solutions that help you build with confidence. We make hiring quality access equipment safer, easier, and less tedious thanks to our team of experts who know what you need to keep the job moving.

Operating since 1994 and with local, on-the-ground support throughout the East Coast, Skyreach is one of Australia's few specialists in EWP and access equipment hire. This singular focus positions us as an expert partner for projects that require superior quality equipment with safety assurance baked in.

Our goal is to set the benchmark in safety, reliability, service, and operational excellence, and our rental fleet is continually renewed and updated with the latest manufacturers' technology. Fully compliant with Australian Standards and supplied with risk assessments, manuals and service records, our hire fleet includes scissor, boom and man lifts; telehandlers; crawlers; hybrid units; lighting towers; specialised access essentials such as duct lifters and pipe racks; and a wide range of OEM attachments.


And when you contact us to hire, you won't be palmed off to a call centre: at Skyreach, you'll always hear a familiar voice on the line. Our team of dedicated people, many of whom have been with the business for decades, are committed to the strong relationships we've built with our customers. We make it our business to know your business, so we can keep your job moving with a minimum of fuss and a healthy dose of down-to-earth customer service.

We've been quietly getting it right for a long time, and we'd be happy to show you how Skyreach can help you stay safe at height and stress-free on the ground.

1994
Operating since

8
East Coast branches

24/7
Field service support

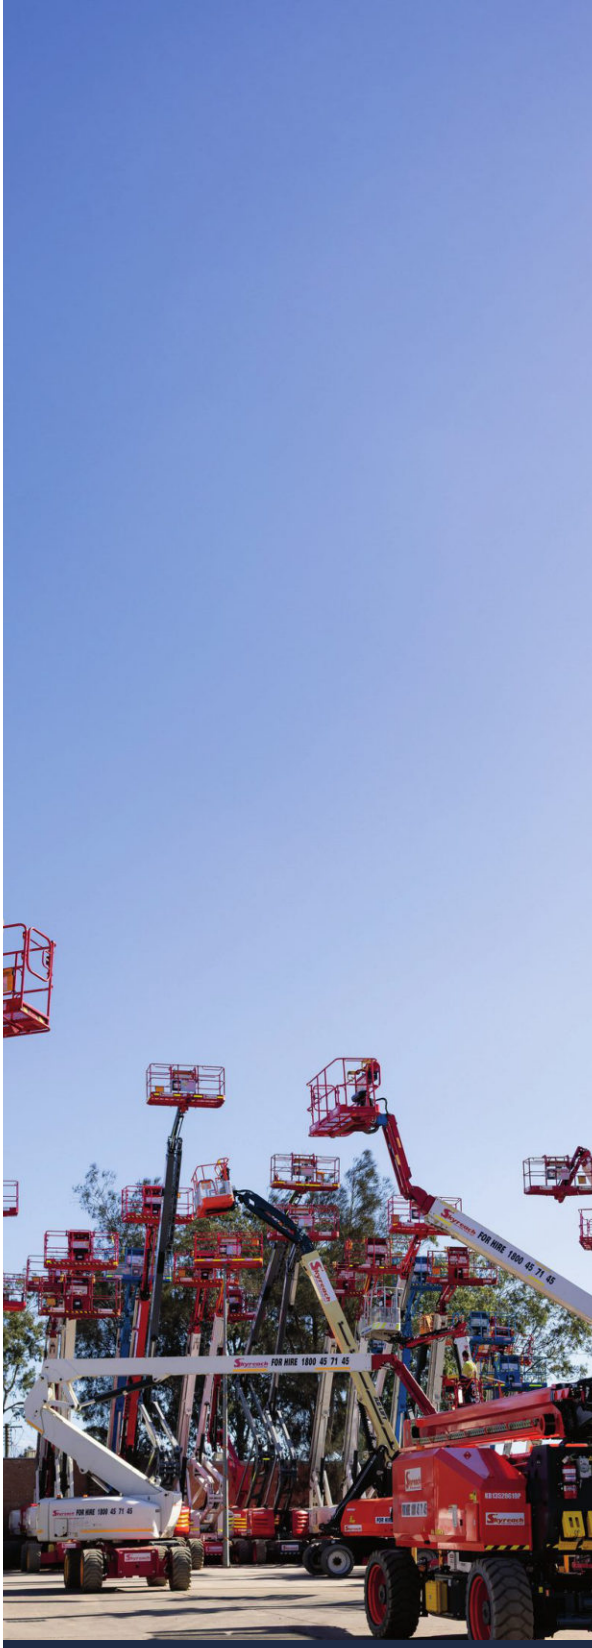





INDUSTRIES SERVICED

- Construction
- Industrial
- Events & Film
- Mining & Resources
- Facilities
- Telecommunications
- Government & Defence

OUR DIFFERENCE

Elevated standards on every single job.



Specialised technical advice

We're an EWP specialist, not a generic hire company. Our expert team know their stuff and will help you get the right equipment for the job, every time, no matter how complex your requirements.

In-house workshops

All Skyreach branches are supported by fully equipped workshops staffed by responsible service teams. Regular in-house and manufacturers' training keep our team's skills sharp when working on the latest digitally enabled machines.

Site inspections

If you're not sure which machine is right for you, our sales staff are available for site inspections to ensure you get the most appropriate and cost-effective solution for your needs.

24/7 support

Each branch has a dedicated Field Service Team with fully equipped service vehicles (including mine spec vehicles in relevant areas). We're on call 24/7 to support you and keep your project rolling.

Reliable, low-hour fleet

An extensive fleet of modern access equipment sets us apart from other rental operators. We invest in equipment from renowned OEMs such as Genie, JLG, Skyjack and Manitou, whose safety focus mirrors our own.

Safety & compliance

If it's not safe, it doesn't go out. No exceptions. Each machine gets a detailed inspection upon return, and all safety and compliance records are available on board for peace of mind.

Sustainability & innovation

We prioritise investment in machines that provide a higher, heavier, and more dynamic lift with improved work envelope and safety features, more efficient operation and reduced fuel requirements, especially with our hybrid and electric options.

> "We've worked with a number of equipment hire companies over the years, but Skyreach stands out for all the right reasons. Their team is responsive, knowledgeable and genuinely committed to helping us get the job done safely and efficiently. From the quality of the equipment through to the service and support, everything is handled professionally. Skyreach has become a trusted partner for our projects, and I wouldn't hesitate to recommend them.
>
> MATT AT SYDNEY WIRING SOLUTIONS







OUR PROCESS

End-to-end support

From the first conversation to the final off-hire check, one team looks after your equipment, and you.



01 **Discussion and site visit**

Our team listens to your requirements and recommends the right equipment that's on spec and within budget.

02 **Pre-inspection and safety checks**

Our service team assesses each asset and ensures the inspection reports, risk assessment, logbook and manual are complete and in place.

03 **Delivery & logistics**

We coordinate with our trusted transport partners to deliver your equipment when and where you need it.

04 **Ongoing support**

24/7 field service is available for peace of mind, and our team is always here to help when you're ready to off-hire.

05 **Off-hire inspection**

Back at our workshop, the equipment is inspected, and a post-hire check is conducted.

06 **Regular check-ins**

Our experienced sales team stays abreast of your upcoming needs and keeps you updated on equipment availability.

EVERY MACHINE ARRIVES WITH

- Inspection report
- Risk assessment
- Logbook
- Operator manual

OUR VALUES

What we stand for

Six values guide every decision we make, on site, in the workshop and on the phone.

Safety is non-negotiable

If it's not safe, it doesn't go out. We will never compromise on the condition of our equipment or the safety of the people using it.

Customers are at the centre of every decision

We are committed to being caring, responsive and genuinely helpful, with a strong focus on understanding and supporting customers in practical ways.

Operational excellence

From equipment quality to service, logistics, communication and compliance, we're driven by doing things properly.

Ownership and accountability

We take responsibility and foster a culture where people step up, act with integrity, and take pride in delivering on their commitments.

Continuous improvement

We're committed to learning, refining and evolving our people, systems and service, so that Skyreach can continue delivering better service to our customers.

Collaborative mindset

We work closely with customers to achieve the best possible outcome. This collaboration is practical, proactive and centred on getting the job done safely, efficiently and successfully.

IF IT'S NOT SAFE, IT DOESN'T GO OUT

- No exceptions
- Inspected on return
- Records on board
- 24/7 field support



OUR RANGE

The right machine, every time.

Elevated work platforms, lift-and-shift equipment, power, lighting and attachments, all maintained in-house, compliant with Australian Standards and supported 24/7.

PAGE 07
Electric scissor lifts
Platform 3.9 m to 30 m



PAGE 08
Rough terrain scissor lifts
Platform 8 – 20 m



PAGE 09
Knuckle booms
Platform 10.5 – 45.7 m



PAGE 11
Stick booms
Platform 13.6 – 45.8 m



PAGE 13
Man lifts
Platform 4.5 – 8 m



PAGE 14
Telehandlers
2.5 – 6 t · lift to 17.55 m



PAGE 16
Specialised telehandlers
Rotating & man-basket



PAGE 17
Forklifts
Electric, LPG & rough terrain




PAGE 18
Attachments
For EWPs, telehandlers & forklifts



PAGE 19
Lighting & air
LED light towers & compressors



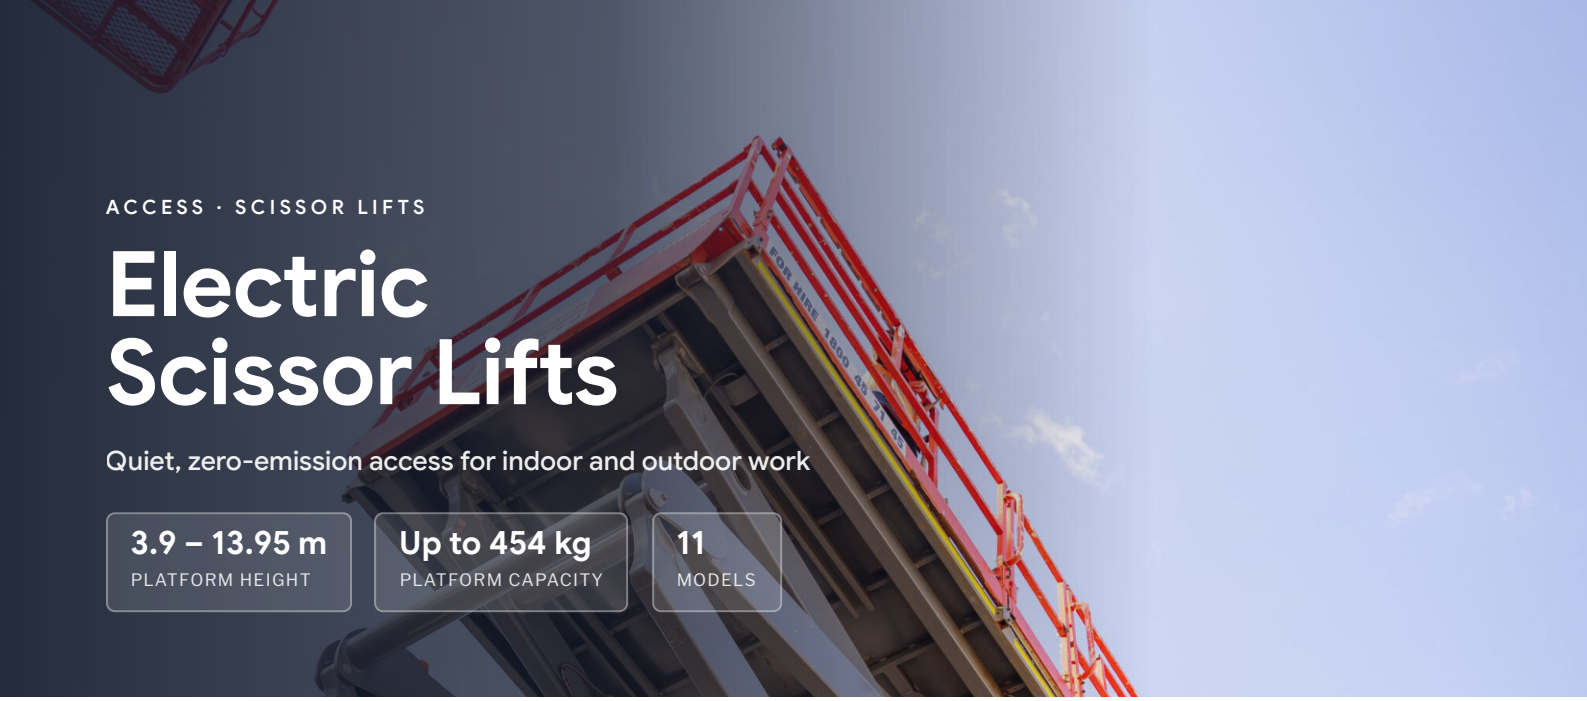

ACCESS · SCISSOR LIFTS

Electric Scissor Lifts

Quiet, zero-emission access for indoor and outdoor work

3.9 – 13.95 m	Up to 454 kg	11
PLATFORM HEIGHT	PLATFORM CAPACITY	MODELS

Our electric scissor lifts are the go-to for indoor fit-outs, maintenance and warehouse work. Compact, non-marking and emission-free, they fit through standard doorways and give you a spacious, stable platform with a slide-out deck.

Zero emissions
Electric drive for indoor use

Non-marking tyres
Safe on finished floors

Drive at height
Full-height drive on most models

Extension decks
Up to 1.22 m extra reach





Model	GS-1330m Genie	GS-1432m Genie	ES1530L JLG	GS-1932m Genie	GS-1932 Genie	GS-2632 Genie	GS-2646 Genie	GS-3232 Genie	GS-3246 Genie	GS-4046 Genie	GS-4655 Genie
Working height inside / outside (m)	5.90	6.30 / 5.66	6.50 / –	7.55 / 7.55	7.64	9.85	9.85 / 9.85	11.60 / 7.49	11.60 / 11.60	13.91 / 9.01	15.95 / 8.55
Platform height inside / outside (m)	3.90	4.30 / 3.66	4.50 / –	5.55 / 5.55	5.64	7.85	7.85 / 7.85	9.60 / 5.49	9.60 / 9.60	11.91 / 7.01	13.95 / 6.55
Extension deck	0.46 m	0.60 m	0.55 m	0.60 m	0.91 m	0.91 m	0.91 m	0.91 m	0.91 m	0.91 m	1.22 m
Platform capacity	227 kg	227 kg	227 kg	227 kg	227 kg	227 kg	454 kg	227 kg	318 kg	350 kg	350 kg
Occupants (in / out)	2 / –	2 / 1	1 / –	2 / 1	2	2 / –	3 / 1	2 / 1	3 / 1	3 / 1	3 / 2
Length stowed	1.41 m	1.40 m	1.43 m	1.40 m	1.83 m	2.36 m	2.36 m	2.36 m	2.36 m	2.36 m	3.11 m
Width stowed	0.78 m	0.81 m	0.76 m	0.81 m	0.82 m	0.81 m	1.17 m	0.81 m	1.17 m	1.17 m	1.40 m
Height stowed – rails up	2.02 m	1.88 m	1.90 m	1.97 m	2.16 m	2.39 m	2.39 m	2.52 m	2.52 m	2.66 m	2.77 m
Height stowed – rails folded	Fixed rails	Fixed rails	–	Fixed rails	Fixed rails	1.88 m	1.70 m	2.00 m	1.85 m	1.98 m	1.98 m
Gradeability	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%	25%
Weight	885 kg	948 kg	880 kg	1,306 kg	1,606 kg	2,037 kg	2,437 kg	2,451 kg	2,809 kg	3,152 kg	3,711 kg

Indoor / outdoor ratings shown where they differ. All specifications are approximate, subject to change without notice and must be confirmed on the machine's compliance plate.



ACCESS · SCISSOR LIFTS

Rough Terrain Scissor Lifts

Power through uneven ground with 4WD and auto-levelling outriggers

8 – 20 m	Up to 1,134 kg	Up to 7
PLATFORM HEIGHT	PLATFORM CAPACITY	OCCUPANTS

Built for construction sites and outdoor projects, our rough terrain scissors combine big platforms and heavy capacities with four-wheel drive, oscillating axles and auto-levelling outriggers, so your crew and materials go up together.


4WD & oscillating axle
Traction on rough ground

Auto-levelling outriggers
Fast, stable set-up

Heavy capacity
Crew, tools and materials

Large platforms
Extension decks front and rear



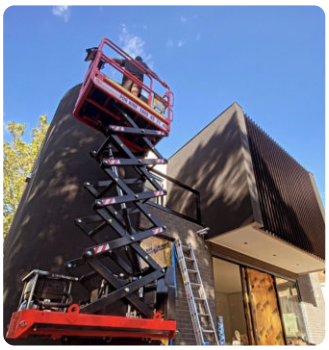



Model	GS-2669 RT Genie	GS-3369 RT Genie	GS-3390 Genie	GS-4390 Genie	GS-5390 Genie	SL2023-AWD Dingli
Working height	10.00 m	11.96 m	12.06 m	15.11 m	18.15 m	22.00 m
Platform height	8.00 m	9.96 m	10.06 m	13.11 m	16.15 m	20.00 m
Extension deck	1.52 m	1.52 m	1.52 m + 1.22 m rear	1.52 m + 1.22 m rear	1.52 m + 1.22 m rear	2.70 m
Platform capacity	680 kg	454 kg	1,134 kg	680 kg	680 kg	750 kg
Occupants (in / out)	4 / 4	4 / 2	7 / 7	7 / 7	4 / 4	4 / 4
Platform size (L × W)	2.79 × 1.60 m	2.79 × 1.60 m	3.98 × 1.83 m	3.98 × 1.83 m	3.98 × 1.83 m	4.59 × 2.25 m
Length stowed (with outriggers)	3.76 m	3.76 m	4.88 m	4.88 m	4.88 m	4.95 m
Width stowed	1.75 m	1.75 m	2.34 m	2.34 m	2.34 m	2.46 m
Height stowed – rails up	2.59 m	2.59 m	2.71 m	2.93 m	3.15 m	3.86 m
Height stowed – rails folded	1.92 m	1.92 m	2.03 m	2.25 m	2.47 m	3.00 m
Drive	4WD, outriggers	4WD, outriggers	4WD, outriggers	4WD, outriggers	4WD, outriggers	4WD / 4WS, outriggers
Gradeability	35%	30%	50%	50%	40%	40%
Weight	3,658 kg	3,861 kg	6,693 kg	6,894 kg	7,862 kg	13,500 kg

Weights shown with outriggers fitted. All specifications are approximate, subject to change without notice and must be confirmed on the machine's compliance plate.

ACCESS · BOOM LIFTS

Knuckle Booms

Up, out and over obstacles – 34 ft to 150 ft

10.5 – 45.7 m
PLATFORM HEIGHT

Up to 22.9 m
OUTREACH

Up to 23 m
UP & OVER

Knuckle booms provide the best range of up 'n' over access, while still allowing mobility. Articulating booms and jibs let you reach around structures and into tight work zones, with selected models offering increased lifting capabilities.

Up 'n' over reach
Articulating boom and jib

Dual capacity
Up to 454 kg restricted

Rough terrain
4WD diesel models


Attachments
Pipe racks & glazier kits

Model	34ft Diesel Genie Z-34/22 IC	45ft Diesel Genie Z-45 XC	62ft Diesel Genie Z-62/40	80ft Diesel Genie Z-80/60	125ft Diesel JLG 1250AJP	135ft Diesel Genie ZX-135/70	150ft Diesel JLG 1500AJP
Platform height	10.54 m	13.86 m	18.87 m	23.77 m	38.30 m	41.15 m	45.72 m
Working height	12.54 m	15.86 m	20.87 m	25.77 m	40.30 m	43.15 m	47.72 m
Horizontal outreach	6.78 m	7.55 m	12.42 m	18.29 m	19.25 m	21.26 m	22.86 m
Up & over clearance	4.60 m	7.44 m	7.80 m	8.83 m	18.44 m	23.01 m	18.40 m
Platform capacity	227 kg	300 / 454 kg	227 kg	227 kg	230 / 454 kg	272 kg	270 / 450 kg
Jib length	1.22 m	1.52 m	1.52 m	1.83 m	2.44 m	3.66 / 6.10 m	2.4 m
Length stowed	5.66 m	6.65 m	9.22 m	11.27 m	11.45 m	12.93 m	12.09 m
Width stowed	1.85 m	2.29 m	2.49 m	2.49 m	2.49 m	2.49 m	2.49 m
Height stowed	2.06 m	2.25 m	2.90 m	3.00 m	3.02 m	3.09 m	3.10 m
Weight	5,017 kg	7,421 kg	10,106 kg	17,369 kg	20,180 kg	21,656 kg	26,027 kg

Platform capacity shown as unrestricted / restricted where dual-rated. All specifications are approximate, subject to change without notice and must be confirmed on the machine's compliance plate.


34ft Diesel

GENIE Z-34/22 IC

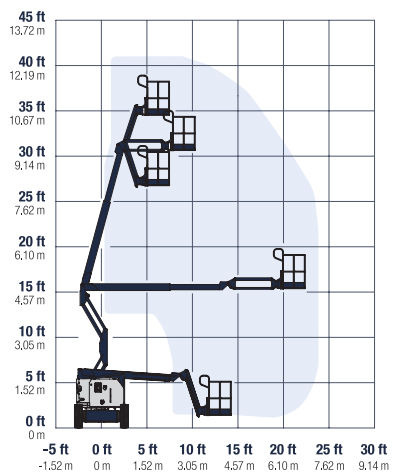


45ft Diesel

GENIE Z-45 XC

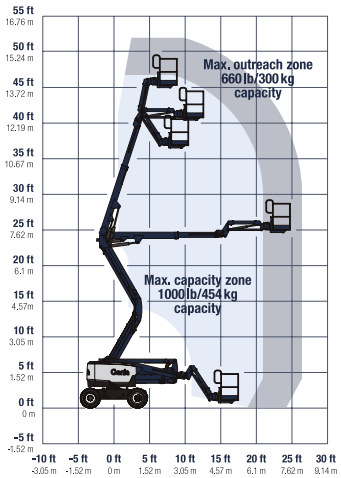

62ft Diesel


GENIE Z-62/40

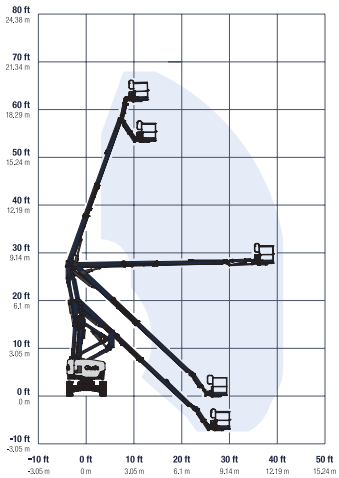

Working envelopes


80ft Diesel

GENIE Z-80/60

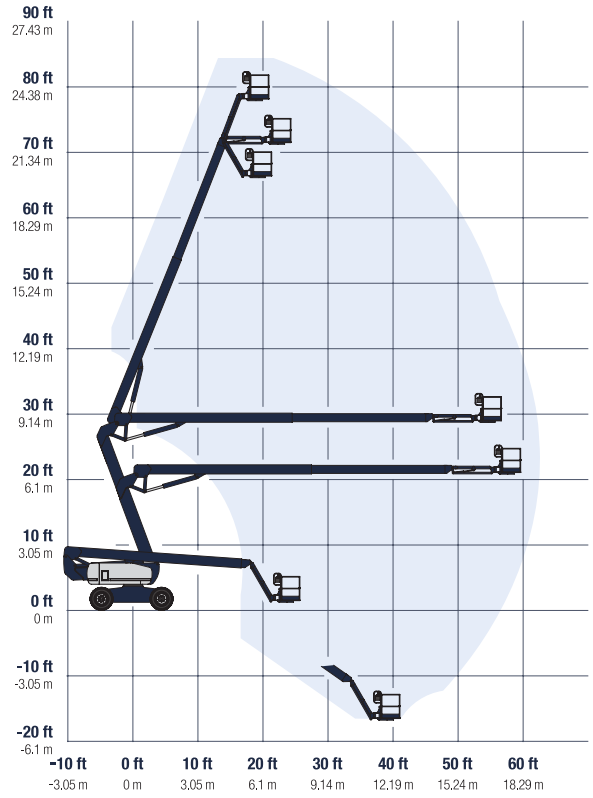


125ft Diesel

JLG 1250AJP

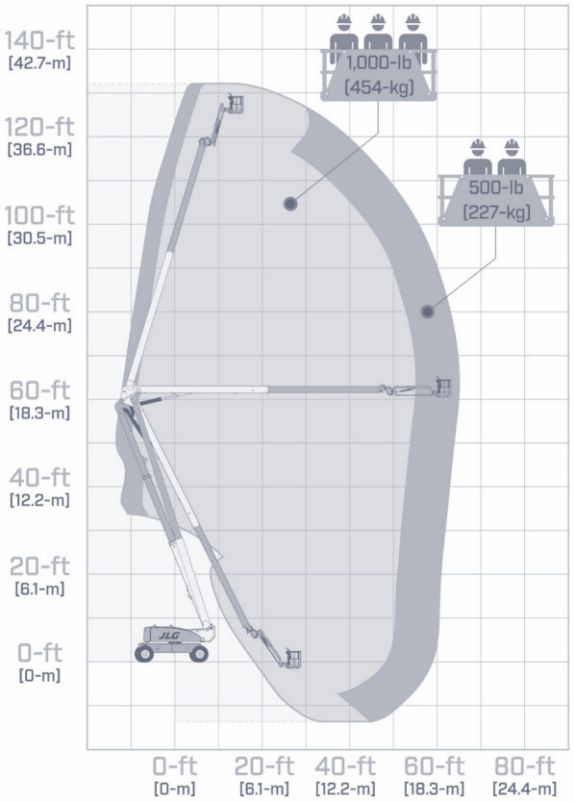


135ft Diesel

GENIE ZX-135/70

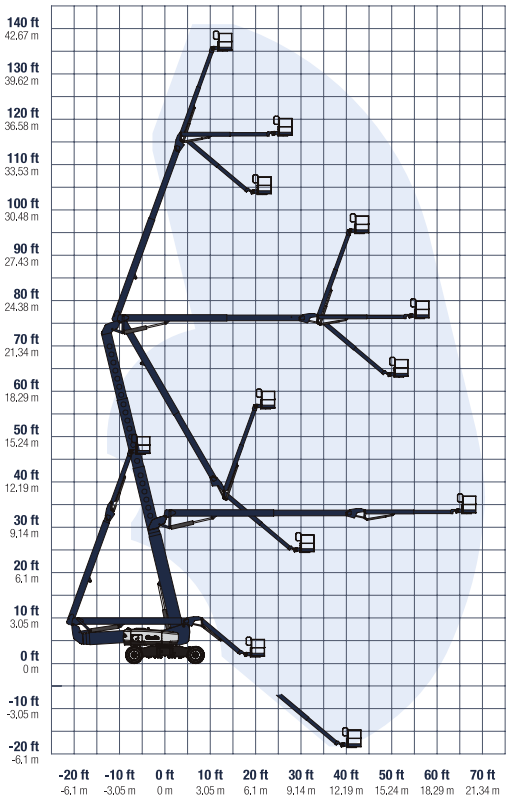

150ft Diesel

JLG 1500AJP

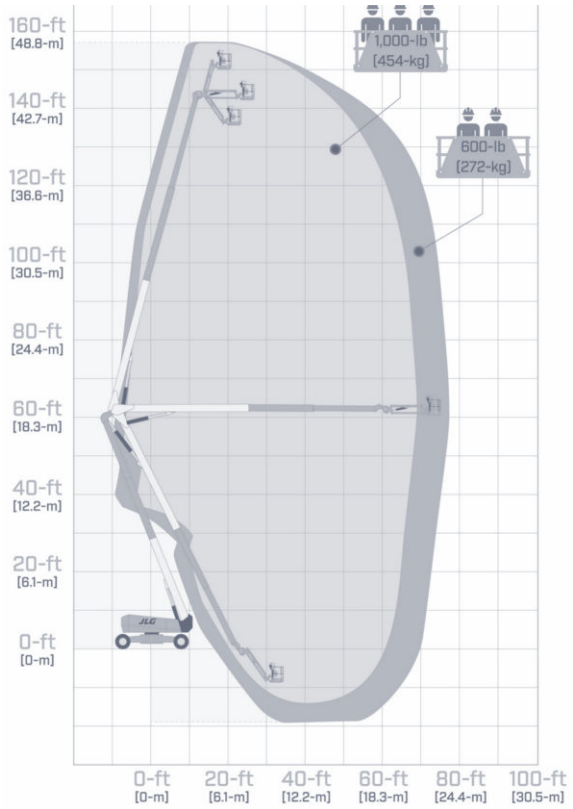



ACCESS · BOOM LIFTS

Stick Booms

Maximum height and horizontal reach – 45 ft to 150 ft

13.6 – 45.8 m	Up to 27.4 m	454 kg
PLATFORM HEIGHT	OUTREACH	RESTRICTED CAPACITY

Our straight (telescopic) booms are built for maximum horizontal and vertical reach, making them ideal for large-scale outdoor projects, façades, steel erection and plant maintenance where you need to get high and far, fast.

Big height
Up to 45.75 m platform

Long outreach
Up to 27.43 m horizontal

Dual capacity
300 / 454 kg on Genie XC


4WD diesel
Rough-terrain ready

Model	45ft Diesel Genie S-45 XC	65ft Diesel Genie S-65 XC	85ft Diesel Genie S-85 XC	135ft Diesel Genie SX-135 XC	150ft Diesel JLG 1500SJ
Platform height	13.56 m	19.81 m	25.91 m	41.15 m	45.75 m
Working height	15.56 m	21.81 m	27.91 m	43.15 m	47.75 m
Horizontal outreach	11.02 m	16.51 m	22.71 m	27.43 m	24.38 m
Platform capacity	300 / 454 kg	300 / 454 kg	300 / 454 kg	300 / 454 kg	230 / 450 kg
Jib length	1.52 m	1.52 m	1.52 m	5.48 / 9.14 m	4.62–7.62 m
Length stowed	9.47 m	9.76 m	12.37 m	19.76 m	13.11 m
Width stowed	2.49 m	2.49 m	2.49 m	2.49 m	2.49 m
Height stowed	2.51 m	2.81 m	2.80 m	3.05 m	3.05 m
Weight	7,276 kg	11,699 kg	18,208 kg	21,822 kg	21,772 kg

Platform capacity shown as unrestricted / restricted where dual-rated. All specifications are approximate, subject to change without notice and must be confirmed on the machine's compliance plate.


45ft Diesel

GENIE S-45 XC

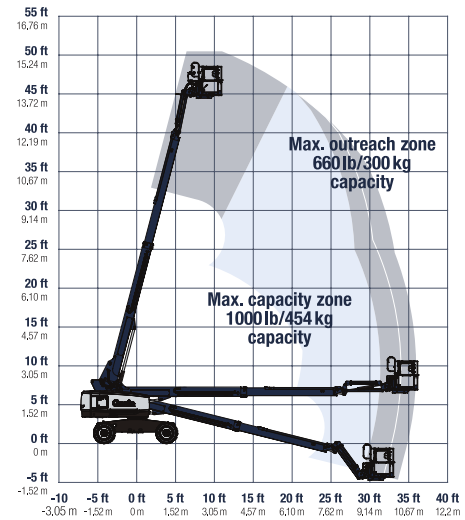

65ft Diesel


GENIE S-65 XC

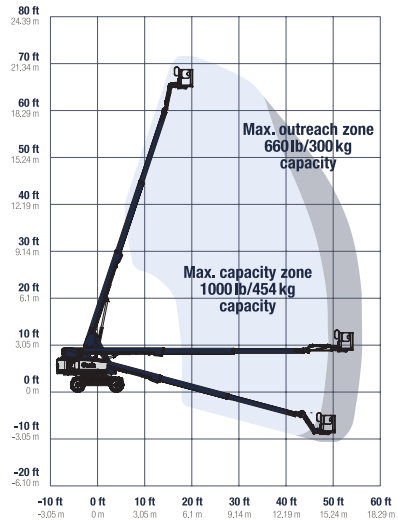

Working envelopes


85ft Diesel

GENIE S-85 XC

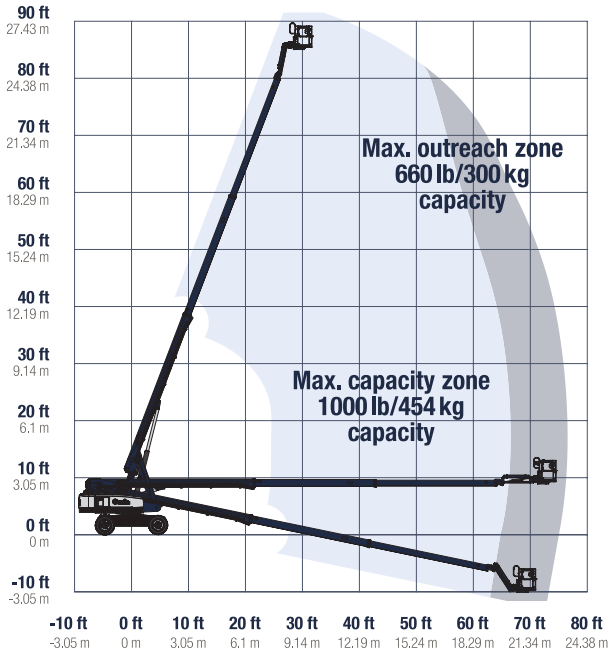


135ft Diesel


GENIE SX-135 XC

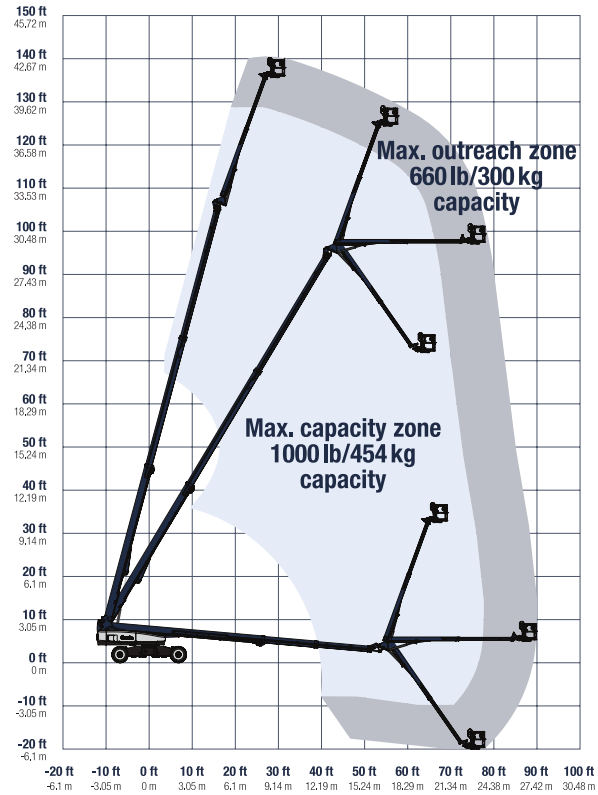

150ft Diesel

JLG 1500SJ

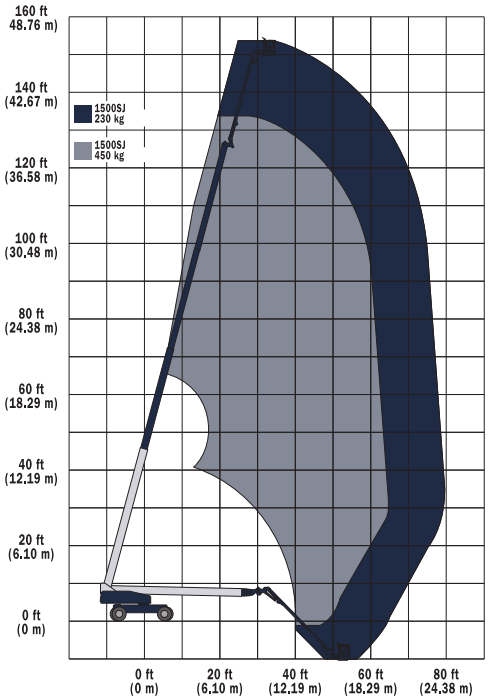

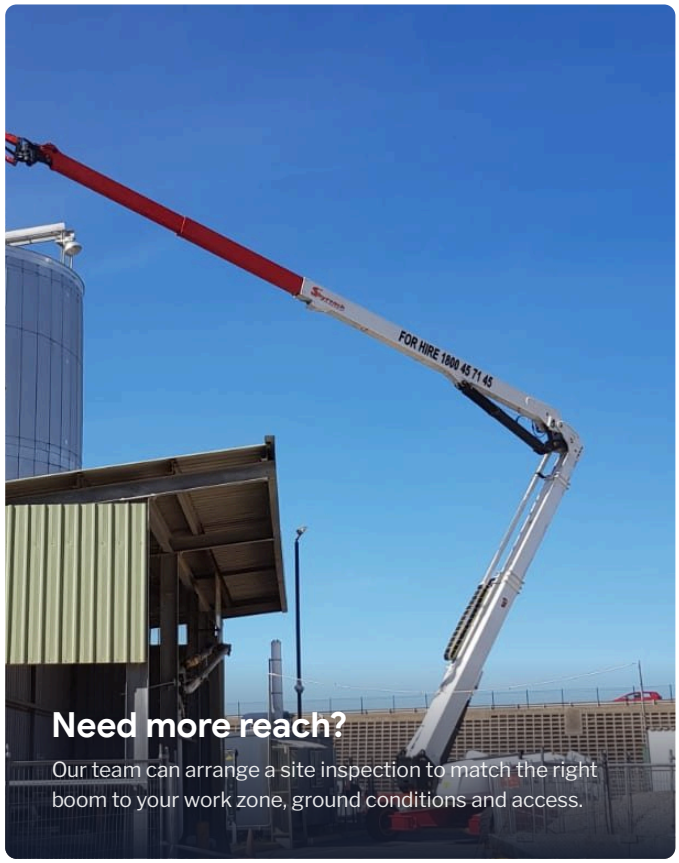

Need more reach?

Our team can arrange a site inspection to match the right boom to your work zone, ground conditions and access.



ACCESS · VERTICAL LIFTS

Man Lifts

Simple vertical access for confined spaces

4.5 – 8 m	Up to 227 kg	0.75 m
PLATFORM HEIGHT	PLATFORM CAPACITY	NARROWEST WIDTH

For simple vertical elevation in confined spaces, a man lift is the solution. Compact, narrow and with a small footprint, they're ideal for working in tight spaces, through doorways and down aisles, and the Star 10 adds 3 m of outreach to get up and over obstacles.

- **Electric powered** — Quiet, emission-free
- **Non-marking tyres** — For finished floors
- **Lift capacity** — 159 – 227 kg
- **Up 'n' over** — Star 10 jib with 3 m outreach



Genie GR-15 & GR-20
4.47 – 6.02 m platform height



Haulotte Star 10
8.00 m platform · 3 m outreach

Model	GR-15 Genie	GR-20 Genie	Star 10 Haulotte
Working height inside / outside (m)	6.47 / 5.40	8.02 / 6.70	10.00
Platform height inside / outside (m)	4.47 / 3.40	6.02 / 4.70	8.00
Horizontal outreach	–	–	3.00 m
Platform capacity	227 kg	159 kg	200 kg
Occupants (in / out)	1 / 1	1 / 1	2 / 1
Platform size	0.89 × 0.75 m	0.89 × 0.75 m	0.78 × 0.98 m
Length stowed	1.35 m	1.35 m	2.70 m
Width stowed	0.75 m	0.80 m	1.00 m
Height stowed	1.78 m	1.98 m	1.99 m
Weight	988 kg	1,140 kg	2,677 kg
Power	24 V battery	24 V battery	24 V AGM battery

Indoor / outdoor ratings shown where they differ. Haulotte Star 10 capacity 200 kg, 2 persons indoor, 1 person outdoor. All specifications are approximate, subject to change without notice and must be confirmed on the machine's compliance plate.



LIFT & SHIFT

Telehandlers

Lift, carry and place loads – 2.5 t to 6 t

2.5 – 6 t
LIFT CAPACITY

Up to 17.55 m
LIFT HEIGHT

Up to 13.5 m
OUTREACH

There's nothing better equipped to lift, carry and elevate loads to significant heights while retaining mobility on the job. Our Manitou and Merlo telehandlers are available with a comprehensive range of hook and jib attachments.

Lift capacity
2,500 – 6,000 kg

Lift height
5.85 – 17.55 m

Outreach
3.40 – 13.50 m

Attachments
Forks, jibs, hooks & buckets



Model	Diesel 2506 Manitou MT-X 625 H	Diesel 3009 Manitou MT 930 H	Diesel 4018 Manitou MT-X 1840	Diesel 5018 Merlo P50.18	Diesel 6009 Manitou MLT-X 961-160 V+ L
Max. lift capacity	2,500 kg	3,000 kg	4,000 kg	5,000 kg	6,000 kg
Max. lift height	5.85 m	8.85 m	17.55 m	17.40 m	9.00 m
Max. outreach	3.40 m	6.05 m	12.70 m	13.50 m	5.30 m
Overall length (to carriage)	3.83 m	4.67 m	6.27 m	6.19 m	6.10 m
Overall width	1.81 m	1.99 m	2.42 m	2.48 m	2.48 m
Overall height	1.92 m	1.99 m	2.45 m	2.54 m	2.55 m
Stabilisers	–	–	Yes	Yes	–
Engine power	55.4 kW	54.6 kW	74.5 kW	85.9 kW	115 kW
Unladen weight	5,280 kg	6,550 kg	12,560 kg	13,150 kg	11,950 kg

Overall length measured to fork carriage. All specifications are approximate, subject to change without notice and must be confirmed on the machine's compliance plate.

Hook & jib attachments

Fixed hooks, jib booms and slippers to suit – see page 18.








Capacity at height & reach

Load charts reproduced from the manufacturers' technical sheets (metric). Always refer to the machine's on-board load chart.


Diesel 2506

MT-X 625 H · ON TYRES WITH FORKS

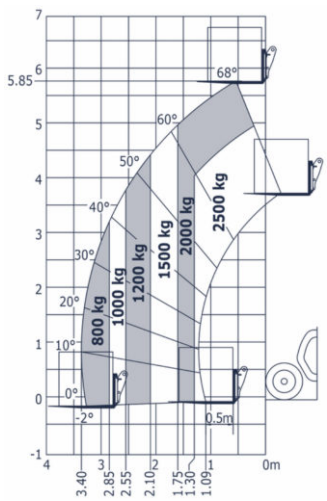


Diesel 3009

MT 930 H · ON TYRES WITH FORKS

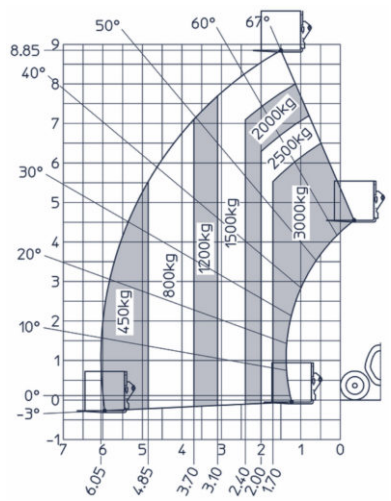


Diesel 4018

MT-X 1840 · ON STABILISERS WITH FORKS

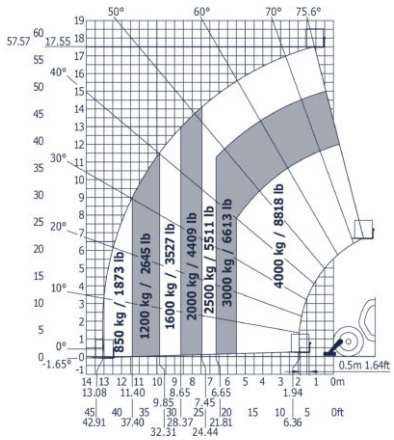


Diesel 5018

MERLO P50.18 · LOAD CHART

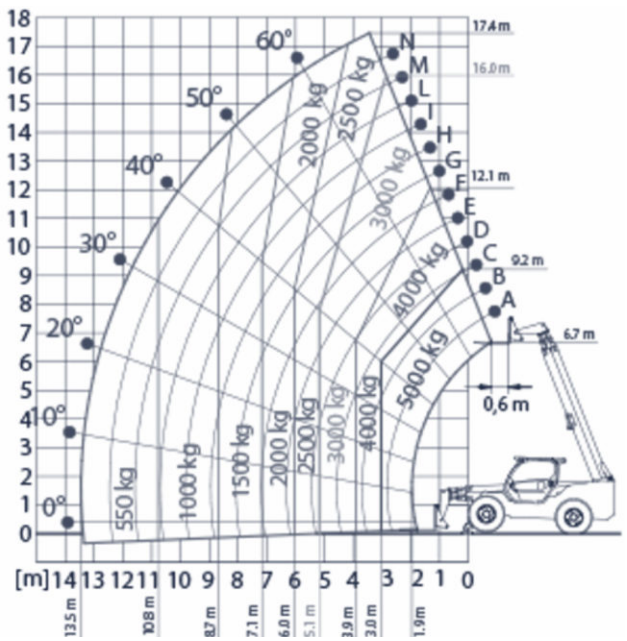

Diesel 6009

MLT-X 961 · ROUGH TERRAIN (EN 1459 B)

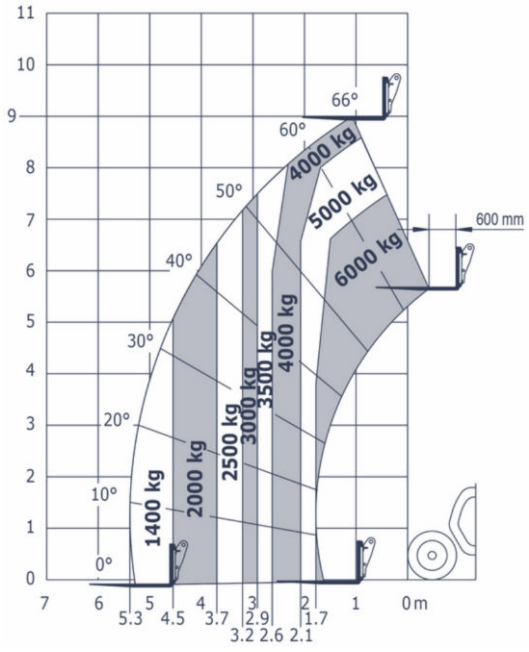



LIFT & SHIFT · SPECIALISED

Specialised Telehandlers

360° rotating telehandlers and a man-basket configured telehandler for the jobs a standard machine can't reach.



ROTATING · 360°

Lift all around

360° turret and duplex stabilisers – lift and place loads all around the machine.

UP TO 25.9 M

Height and outreach

Lift to 25.9 m and reach 21.7 m – ideal for steel, roofing and façades.

MAN BASKET


Telehandler with EWP basket

A 4 t / 17.55 m telehandler with a personnel basket rated to EN 280.

Model	Rotating 26m Manitou MRT 2660	Rotating 25m Manitou MRT-X 2550 Privilege Plus	4018 + Man Basket Manitou MT-X 1840 A
Max. lift capacity	6,000 kg	4,999 kg	4,000 kg
Max. lift height	25.90 m	25.78 m	17.55 m
Max. outreach	21.70 m	21.40 m	12.40 m
Turret rotation	360°	360°	–
Overall width	2.50 m	2.49 m	2.42 m
Width, stabilisers extended	5.79 m	5.55 m	3.79 m
Overall height	3.10 m	3.05 m	2.45 m
Engine power	115 kW	110 kW	74.5 kW
Weight	18,000 kg	18,900 kg	12,560 kg


MRT 2660

ON STABILISERS WITH FORKS

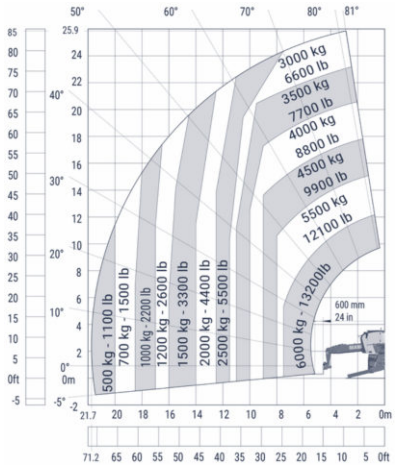


MRT-X 2550

ON STABILISERS WITH FORKS

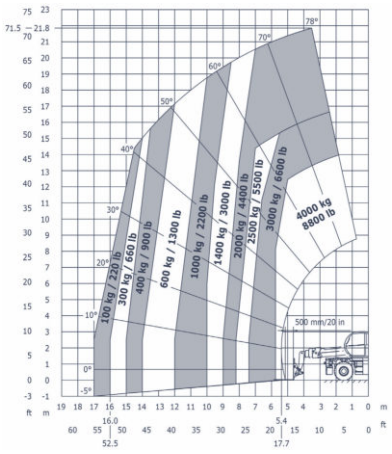


MT-X 1840 A

MAN-BASKET WORKING ENVELOPE (EN 280)

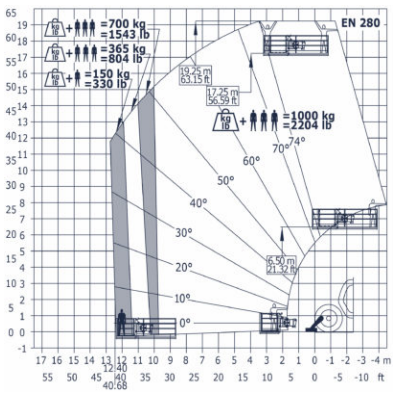

All specifications are approximate, subject to change without notice and must be confirmed on the machine's compliance plate.

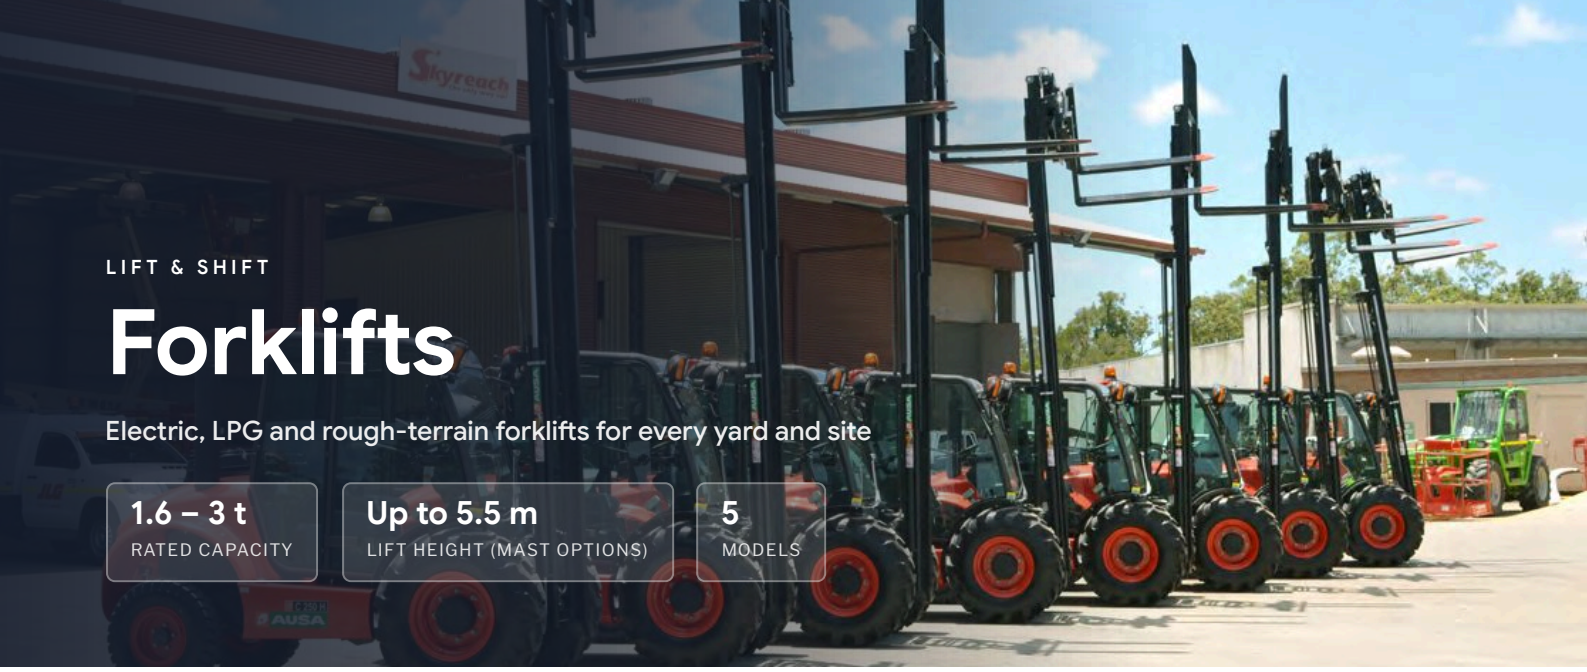

LIFT & SHIFT

Forklifts

Electric, LPG and rough-terrain forklifts for every yard and site

1.6 – 3 t	Up to 5.5 m	5
RATED CAPACITY	LIFT HEIGHT (MAST OPTIONS)	MODELS

We now stock a fleet of forklifts. For warehousing, work sites, or factory operations, choose clean lithium-electric and LPG counterbalance trucks from Enforcer, or Manitou rough-terrain forklifts built for unsealed ground.

- **Lithium electric** — Zero emissions indoors
- **Rough terrain 4WD** — Manitou MC-X
- **Up to 3,000 kg** — Rated capacity
- **Attachments** — Slippers & fork rotators



Model	2.5T Electric Enforcer FLBCXE25	2.5T LPG / Petrol Enforcer FLGCXT25	1.6T Reach Stacker Enforcer WSBPRE16 Li	2.5T Rough Terrain Manitou MC-X 25-4	3.0T Rough Terrain Manitou MC-X 30-4
Rated capacity	2,500 kg	2,500 kg	1,600 kg	2,500 kg	3,000 kg
Load centre	600 mm	600 mm	600 mm	600 mm	600 mm
Lift height (std mast)	3,000 mm	3,000 mm	2,700 mm	3,300–5,500 mm	3,300–5,500 mm
Power	80 V / 150 Ah lithium	LPG / petrol, 47 kW (LPG)	24 V / 120 Ah lithium	Diesel, 36 kW	Diesel, 37 kW
Length to fork face	2,520 mm	2,605 mm	1,225 mm	3,045 mm	3,085 mm
Overall width	1,240 mm	1,155 mm	1,415 mm	1,450 mm	1,450 mm
Overhead guard height	2,200 mm	2,135 mm	–	2,155 mm	2,155 mm
Turning radius	2,230 mm	2,245 mm	1,682 mm	3,405 mm	3,435 mm
Service weight	4,050 kg	4,065 kg	586 kg	4,035 kg	4,870 kg

Manitou MC-X lift height depends on mast fitted. All specifications are approximate, subject to change without notice and must be confirmed on the machine's compliance plate.

Forklift attachments

Slippers and fork rotators available – see page 18.





The right tool for the task.

Skyreach also provide attachments that secure to EWPs, telehandlers and forklifts, pipe racks, panel lifters and glazier kits for EWPs, jib and hook attachments for telehandlers, and fork rotators and slippers for forklifts.

SCISSOR LIFTS

Pipe racks



SCISSOR LIFTS

Panel lifters



BOOM LIFTS

Boom pipe racks



BOOM LIFTS

Glazier kits



TELEHANDLERS

Fixed hooks



TELEHANDLERS

Jib booms



TELEHANDLERS & FORKLIFTS

Slippers



TELEHANDLERS & FORKLIFTS

Fork rotators



Paperwork with every attachment

Skyreach provide hazard & risk assessments, compliance and certification paperwork with each attachment, so it's ready to work the moment it arrives on site.

Light up the site. Power the tools.

Portable Atlas Copco LED light towers and diesel air compressors, dependable, mobile and versatile for night shifts, road works, enclosed areas and remote sites.

LED LIGHT TOWER



Atlas Copco HiLight H5+

Up to 131 hours of runtime on a single tank, with low-glare directional LED lenses that reduce dark spots.

Light coverage	**5,000 m² (avg. 20 lux)**
Lamps	**LED, directional optics**
Rated power (PRP)	**2.7 kW**
Mast	**Vertical hydraulic**
Engine	**Hatz 1B50, 1-cyl, air-cooled**
Fuel capacity	**120 L**
Runtime, lamps on	**131 hrs**
Sound pressure @ 7 m	**65 dB(A)**
Transport dims (L × W × H)	**2.54 × 1.28 × 2.50 m**
Weight	**1,121 kg**

AIR COMPRESSOR



Atlas Copco XAS 98

A compact, towable 8 Series portable compressor delivering 187 cfm at 7 bar, ideal for air tools, sandblasting prep and general site air.

Free air delivery	**5.3 m³/min (187 cfm)**
Working pressure	**7 bar (100 psi)**
Engine	**Kubota V1505-T, 33 kW**
Fuel tank	**60 L**
Noise level	**101 dB(A)**
Dimensions, portable (L × W × H)	**2.29 × 1.35 × 1.40 m**
Weight, portable	**749 to 785 kg**

All specifications are approximate, subject to change without notice and must be confirmed on the machine's compliance plate.

OUR FOOTPRINT

East Coast coverage. Local knowledge.



Cairns
19/21 Franzmann St, Bungalow QLD 4870

Townsville
31-35 Whitehouse Street, Garbutt QLD 4810

Mackay
17 Spiller Ave, Mackay Harbour QLD 4740

Brisbane North (Head Office)
7-21 Skyreach Street, Caboolture QLD 4510

Brisbane South
16 Cottesloe Street, Stapylton QLD 4207

Newcastle
62 Bonville Avenue, Thornton NSW 2322

Sydney
33-35 Vallance Street, St. Marys NSW 2760

Melbourne
47-49 Agosta Drive, Laverton North VIC 3026

Safe at height. Sorted on the ground.

Skyreach is the access hire partner you'll never have to chase. You'll get the same people every time you call, who know your projects, your area, your timelines, and how you like to work. For the right equipment, impeccably maintained, and service you can depend on, contact Skyreach – the partner that keeps you safe up top and sorted below.

EQUIPMENT | SERVICE | SUPPORT | SAFETY

1800 457 145

rentals@skyreach.com.au

skyreach.com.au

Skyreach pty ltd the only way up!

NISHIO
Powered by Nishio Rent All Co., Ltd.

NSWICC PARTNER

Skyreach Pty Ltd. All specifications shown are approximate only and are subject to manufacturers' change without notice. Images are for illustrative purposes. Proud partner of the NSW Indigenous Chamber of Commerce.