

HA20 E
HA20 E PRO

BOOST YOUR PRODUCTIVITY

> Oscillating axle and 4-wheel steering for more agility (PRO model)
> Haulotte Extra Reach : additional load and tilt capacity up to 350 kg and 6° (optional)

OPERATE ANYTIME ANYWHERE WITH ZERO EMISSION

> Full electric drive
> Silent and clean operations
> Versatile use: indoor / outdoor on all types of worksites

EXTEND YOUR DUTY CYCLES

> More than one day of assured duty cycle in complete electric mode
> Multiple and fast charging solutions adapted to all worksite situations
> Fast charging thanks to removable Range Extender (option compatible with other PULSEO machines)

WORK SAFELY

> Haulotte Activ'Shield Bar: anti-crushing system (standard on PRO model)
> Haulotte Activ'Lighting System: load and unload the machine in low visibility conditions (standard on PRO model)
> Transport handle to ensure the operator is safe while loading and unloading (optional)


HA20 E
HA20 E PRO

ARTICULATING BOOMS ELECTRIC

TECHNICAL DATA

	HA20 E	HA20 E PRO
Working height	20.5 m	
Platform height	18.5 m	
Horizontal outreach	11.9 m	
Up and over clearance	8.5 m	
Lift capacity	250 kg - option 350 kg	
A Length	8.6 m	
B Width	2.43 m	
C Height	2.47 m	
D Wheelbase	2.5 m	
E Ground clearance	30 cm	
F x G Platform size	2.44 x 0.91 m	
H Storage / transport length	6.16 m	
I Storage / transport height	2,98 m	
Tailswing	42 cm	
Tilt	4° - option 6°	
Proportional drive speed	0.5 - 5 km/h	
Maximum wind speed rating	45 km/h	
Gradeability	40 %	
Turning radius - outside	5,2 m	3.7 m
Weight	9 790 kg	9 940 kg
Batteries	72 V - 390 Ah (C20)	

Some options increase the machine weight.

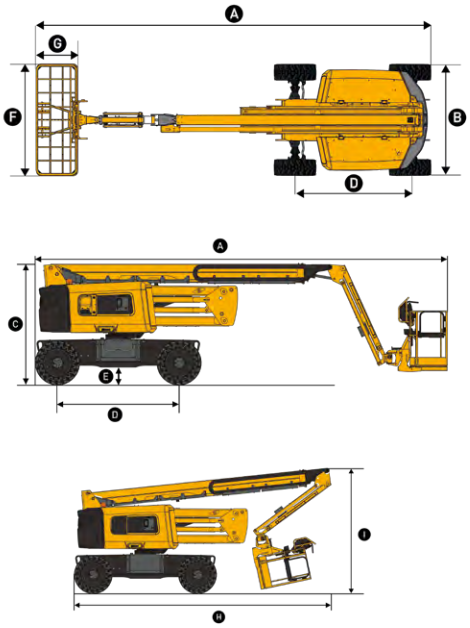


STANDARD EQUIPMENT

> Haulotte Extra Reach
> Haulotte Activ'Screen
> Haulotte Activ'Shield Bar (standard PRO model)
> Haulotte Activ'Lighting System (standard PRO model)
> Haulotte Activ'Energy Management: smart system
> AGM battery pack 72V - 390Ah
> Large basket 2.44 x 0.91 m
> Proportional and simultaneous movements
> Front oscillating axle (standard PRO model)
> 4-wheel drive and 2-wheel steering (standard E model)
> 4-wheel drive and 4-wheel steering (standard PRO model)
> Non-marking tires
> 355° non-continuous rotation
> Drive orientation assist
> Flashing light
> Universal telematic plug

OPTIONS & ACCESSORIES

> FASTN, universal and active anchorage
> REX 5.2 kW - Stage 5 (+ 250 kg)
> Range Extender protective cover
> Accelerated charger 380V
> Lithium-Ion maintenance-free batteries
> Transport handle
> Swing door entry gate
> Working light
> Glazier kit
> Pipe cradle
> USB plug
> 360° continuous rotation (optional on PRO model only)
> Shipyard package
> Cold weather package
> Biodegradable hydraulic oil
> Circuit breaker
> Sherpal telematics subscription
> User drive assist

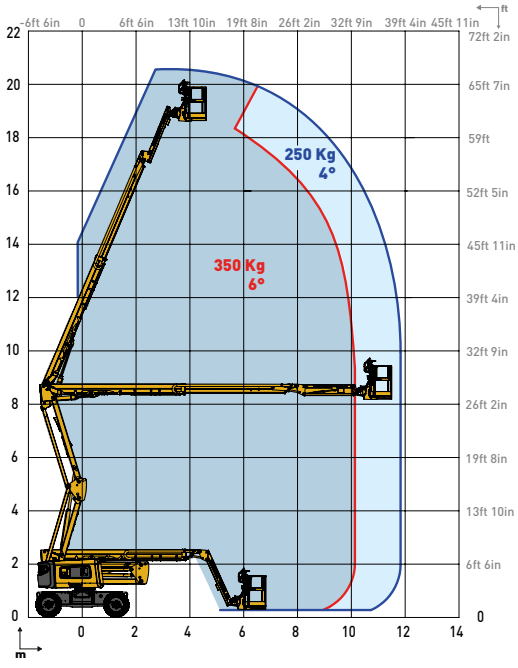

4001300930 · Non contractual document · We reserve the right to modify the technical characteristics of this document without notice · 05/2025

Haulotte Australia Pty Ltd · 46 Greens Road - VIC 3175 VIC Dandenong, Australia ·
Phone: +61 300 207 683 · Fax: +61 3 9792 1011 · salesau@haulotte.com · **www.haulotte.com.au**

Haulotte
LET'S DARE TOGETHER