




C250H ROTATOR - 2.5T

FORK LIFT AUSA 250H

SPECIFICATION	METRIC
Safe Working Load Capacity	1305kgs
Load Centre	600mm
Drive	4 x 2
Mast - Triplex	3 STAGE
Mast Lift Height (MAX.)	3.70m
Mast Lift Height (Headboard) MAX.	4.20m
Mast Lowered height	2.20m
Mast Tilt (back) angle	13 Å°
Mast Tilt (forward) angle	10 Å°
Sideshift	No
Tines	1.20m
Length (With Tines)	4.24m
Length (No Tines)	1.2m
Width	1.54m
Height	2.15m
Gradeability	25-37%
Weight	4650kgs
Tyres (Front Pressure)	450 kpa
Tyres (Rear Pressure)	850kpa
Travel Speed (Max.)	20kph
Power Source	DIESEL
Fuel Tank Capacity	50 litres
Road Registration (Limited)	CONDITIONAL
Operators Licence	FORKLIFT

Machine specifications are approximates & subject to change by the manufacturer without notice.

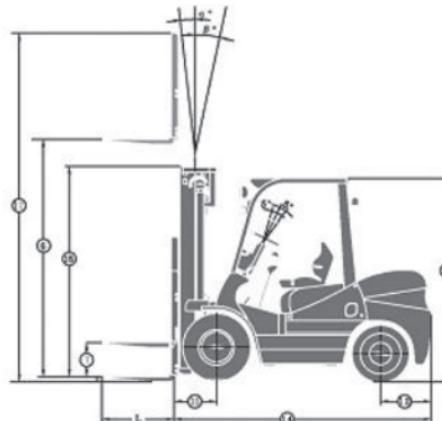

Load Chart

LIFT HEIGHT \leq 3000 MM

