

ELECTRIC ROUGH TERRAIN SCISSOR LIFTS

PULSEO
GENERATION



HS15 E PRO HS18 E PRO



HIGH PERFORMANCE & ROUGH TERRAIN CAPACITIES

- › Platform capacity of 750 kg
- › Oscillating axle delivers excellent ground adherence
- › Drive axle with manual locking rear differential increases ground traction

FULL ELECTRIC DRIVE

- › Silent & clean operations
- › Versatile use: outdoor / indoor
- › Smooth & proportional movements

MAINTENANCE AND SERVICE-ORIENTED

- › Activ'Screen: on-board configuration & diagnostic interface
- › Easy access to components
- › Activ'Energy Management takes care of your battery

EXTENDED DUTY CYCLES

- › Multiple charging modes including optional accelerated charge
- › Optional & removable, low fuel consumption Range Extender

HS15 E PRO



HS18 E PRO

ELECTRIC ROUGH TERRAIN SCISSOR LIFTS

TECHNICAL DATA

	HS15 E PRO	HS18 E PRO
Working height	15 m	18 m
Platform height	13 m	16 m
Max. drive working height	15 m	13m
Lift capacity	750 kg (4 pers.)	
Lift capacity on the extension deck		225 kg
A Platform length - outside		3.93 m
Platform length - extended		5.89 m
B XL platform length (option)		4.94 m
XL platform length - extended (option)		7.5 m
Length - extension		0.98 m
Length - extension XL option		1.28 m
C Platform width - outside		1.89 m
D Height - stowed	3.05 m	3.15 m
Guardrails lowered	2.25 m	2.36 m
E Overall width		2.3 m
F Length		4.4 m
G Wheelbase		2.76 m
H Ground clearance		30.7 cm
Drive speed		5 km/h
Gradeability	45 %	40 %
Tilt (longitudinal / lateral)	5° / 3°	5° / 2°
Turning radius - outside		6.75 m
Tyres		830 x 285 mm
Batteries		8 x 6 V - 435 Ah (C20)
Weight	7 518 kg	8 048 kg

Certain options increase the machine weight

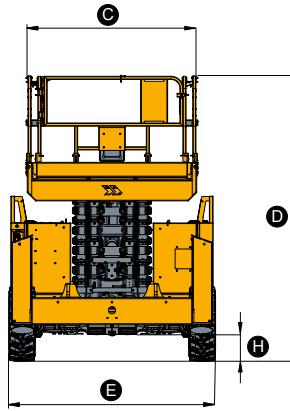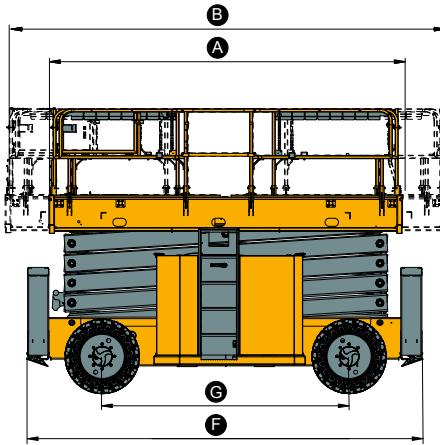

STANDARD EQUIPMENT

- > Front oscillating axle - 6°
- > 4 wheel drive
- > Mechanical axle with manual locking rear differential
- > Outriggers with centralised or individual controls
- > Dual platform extensions
- > Two swing gate entries
- > Folding handrails
- > Haulotte Activ'Energy Management: smart battery management system & manual centralised watering
- > AC motors
- > 48V battery pack
- > Haulotte Activ'Screen
- > Haulotte Activ'Lighting System for safe loading in conditions of low visibility

OPTIONS AND ACCESSORIES

- > Range Extender (5.5 kW) (standard in AUS / NZ)
- > Cold & arctic weather kits
- > Non marking tyres (standard in AU / NZ)
- > Material handling rack
- > AC power to platform plug (110 / 230 V)
- > Double drop bar entries
- > XL platform with dual extensions (7.5 m)
- > Platform lighting
- > Work light
- > Automatic battery water-filling system
- > Accelerated charger (380 V) (standard in AUS / NZ)
- > Scissors stack protection
- > Telematics holder & predisposition
- > Telematics solutions

